


QUICKTRONIC® PROFESSIONAL – ECG for T5/16 mm – circular lamp

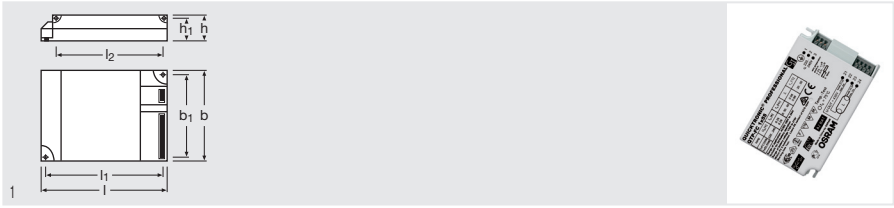

Product reference	Product number							
QTP-FC 1X55 ¹⁾	4008321537041	1xFC 55	1x4200	0.26	59	0.98	-20...+50	154...276
		1xDL 55	1x4800	0.26	59	0.98	-20...+50	

Product reference								
QTP-FC 1X55 ¹⁾	40...50	103	67	31	350	67	20	1

1) Optional cable clamp, see chapter ECG mountings - cable clamp

Product features

- Supply voltage: 220...240 V
- Line voltage: 198...264 V
- Line frequency: 0 Hz / 50 Hz / 60 Hz
- Lamp start with optimum filament preheating
- Energy Efficiency Index EEI: A2 BAT
- Automatic shutdown of defective lamps and at end of life (EoL)
- Lamp operation: to EN 60929
- Safety: to EN 61347-2-3

Product benefits

- Long lamp life
- No adverse effect from frequent on/off switching
- Automatic restart after lamp replacement
- Perfect lamp start for applications with motion sensors
- VDE/VDE EMC certified system
- Separate installations thanks to optional cable clamp for K2 and K3 casings

Areas of application

- Emergency lighting systems acc. to EN 50172 / DIN VDE 0108-100
- Public buildings
- Open-plan offices, corridors and storage rooms
- Suitable for luminaires of protection class I and II
- Suitable for indoor installations